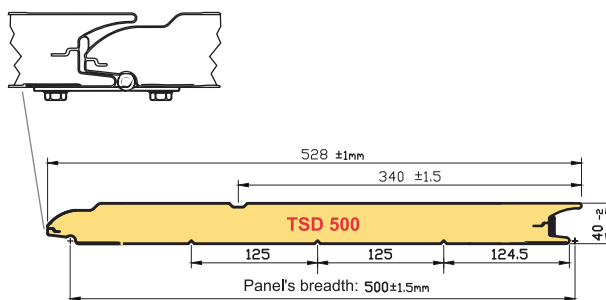


TSD 500

TECSEDO® SAFE Dual

TSD 500
WINCHESTER - SMOOTH








TSD 500
RAL 9010 - WOODGRAIN



Panel Weight:		
WG	P25 & P5	4.85 Kg/m
POLY	POLY 25	5.70 Kg/m
WG SM	PVC 140	4.90 Kg/m
WG	P35	4.60 Kg/m
SM	P35	5.10 Kg/m
Weight Tolerance		±5%
Ridges (Standard)		125 mm
λ m °C		<0.022
k Watt m °C		0.50
I (ISO 717)		25
Soundproof Index (dB)		

40 mm

Panel weight is for indication purposes only.
Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecsedo recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face		COATING External Face		TYPE External Face		COLOURS*								* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.				
WOODGRAIN																		
	5µm Paintable Primer			STANDARD GREY														
	25µm Polyester	STANDARD COLOURS		RAL 8014		RAL 9002		RAL 9010										
		OTHER COLOURS		RAL 6005		RAL 6009		RAL 7016		RAL 9006		Other RAL colours are available on request, subject to minimum quantities						
	35µm Polyester Multilayer					GBROWN		DBROWN										
	UV Resistant 140µm PVC Film					GOLDEN OAK		DARK OAK		GREEN OAK		MAHOGANY		WENGE		WINCHESTER		ANTHRACITE
POLYGRAIN																		
	25µm Polyammidic					RAL 7016		RAL 9016										
SMOOTH																		
	35µm Polyester Multilayer					GBROWN		DBROWN										
	UV Resistant 140µm PVC Film					GOLDEN OAK		DARK OAK		GREEN OAK		MAHOGANY		WENGE		WINCHESTER		ANTHRACITE
INTERNAL FACE	COLOURS					25µm Polyester			 RAL 9002 Stucco		 RAL 9010 Stucco		 RAL 9002 Smooth		 RAL 9010 Smooth			